


AD NO. ODC FILE COPY





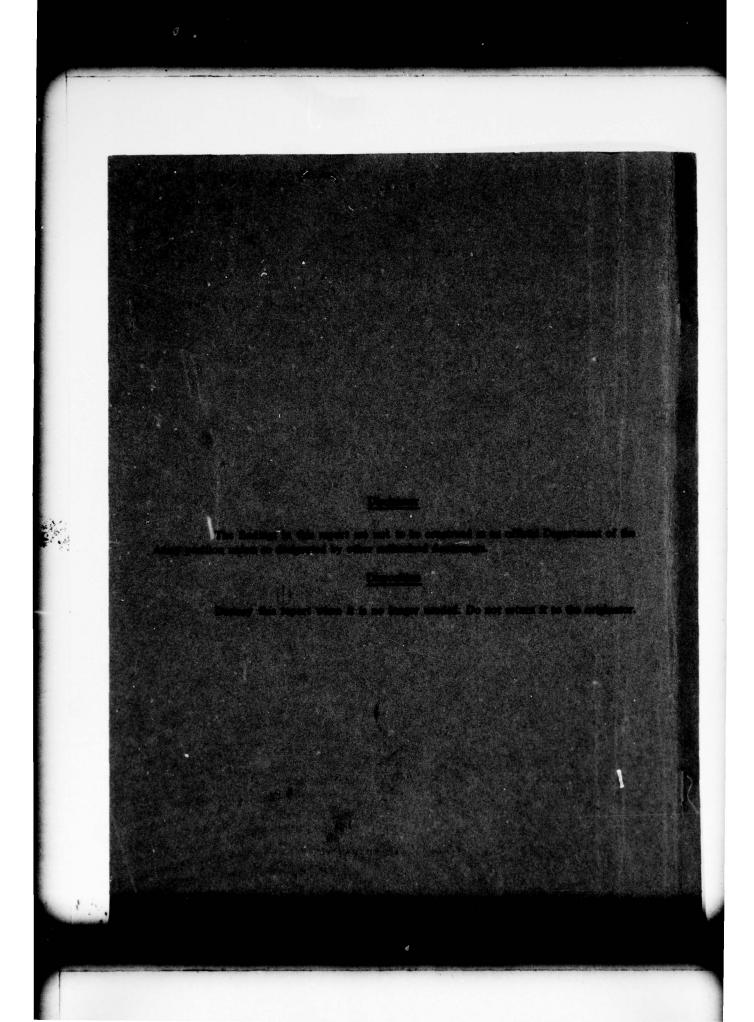

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

READ INSTRUCTIONS BEFORE COMPLETING FORM REPORT DOCUMENTATION PAGE 3. RECIPIENT'S CATALOG NUMBER 2. GOVT ACCESSION NO. ARCSL-TR-78007 TYPE OF REPORT & PERIOD COVERED Technical Report . ELECTRICAL CONDUCTIVITY OF MOIST AIR. August November 1977 1. CELL DESIGN AND FABRICATION FROM G ORG. REPORT NUMBER THE WATER ION CLUSTER THEORY CONTRACT OR GRANT NUMBER(5) AUTHOR(.) Hugh R./Carlon 9. PERFORMING ORGANIZATION NAME AND ADDRESS PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Director, Chemical Systems Laboratory Attn: DRDAR-CLB-PO Aberdeen Proving Ground, Maryland 21010 11. CONTROLLING OFFICE NAME AND ADDRESS 2. REPORT DATE May 1978 Director, Chemical Systems Laboratory Attn: DRDAR-CLJ-R 13. NUMBER OF 31 Aberdeen Proving Ground, Maryland 21010 15. SECURITY CLASS. (of this report) 14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office) UNCLASSIFIED 154. DECLASSIFICATION DOWNGRADING SCHEDULE NIA 16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

In-house laboratory independent research

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

(U) "Continuum" absorption

Electrical conductivity Water vapor Moist air

Ion clusters

Water clusters Hydrogen bonds Polymolecular

Infrared

Conductivity cell

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

(U) Beginning with the infrared water ion cluster theory, this report outlines the development of equations leading to the design of an air conductivity cell, which has been fabricated. In earlier work, we showed that anomalous "continuum" absorption by the atmosphere of infrared radiation could be attributed to intermolecular, hydrogen bonds in polymolecular ion clusters of -

(Continued on reverse side)

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Date


# 20. ABSTRACT (Continued)


water which are always present in equilibrium concentrations in samples of water vapor. For example, these clusters can have the form  $H_3^{\circ}O_{1}^{\bullet}(H_2^{\circ}O)_{1}^{\circ}$ , where n=10 or 11 in moist air, paired with more mobile ions such as OH. Therefore, electrical conductivity measurements of moist air should show direct correlations with water cluster concentrations and hence with infrared transmission of the atmosphere. Agreement of preliminary experimental data from the cell with theory is good, suggesting new avenues of investigation in electrostatics such as space charge dissipation.

### **PREFACE**

The work described in this report was authorized under the In-house Laboratory Independent Research Program. The work was started in August and completed in November 1977. The experimental data are recorded in notebooks 9613 and 9615.

Reproduction of this document in whole or in part is prohibited except with permission of the Director, Chemical Systems Laboratory, Attn: DRDAR-CLJ-R, Aberdeen Proving Ground, Maryland 21010; however, Defense Documentation Center and the National Technical Information Service are authorized to reproduce the document for United States Government purposes.



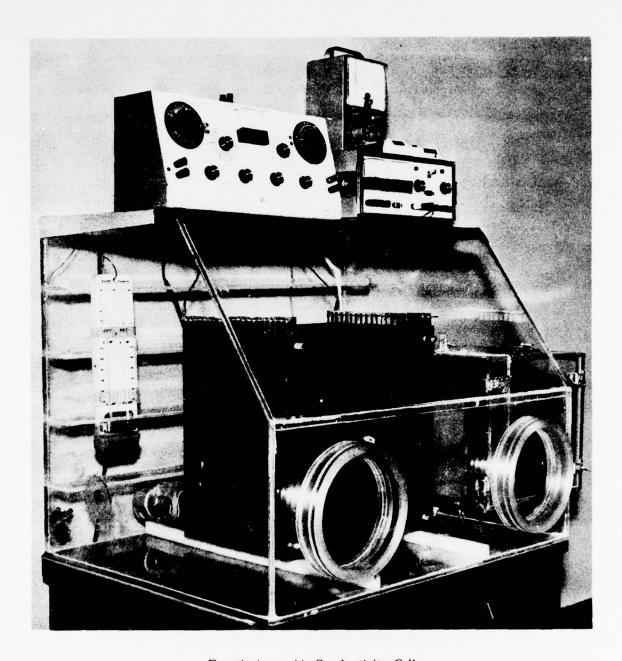

Frontispiece: Air Conductivity Cell

PRECEDING PAGE NOT FILMED BLANK

# CONTENTS

		Page
1.	INTRODUCTION	9
II.	INFRARED OBSERVATIONS LEADING TO THE CELL DESIGN	9
III.	DESIGN PROCEDURE AND CELL FABRICATION	16
IV.	RESULTS OF OTHER WORKERS	19
V.	CONCLUSIONS	23
	LITERATURE CITED	25
	GLOSSARY	27
	DISTRIBUTION LIST	29
	LIST OF FIGURES	
Figure		
1	Approximate Equilibrium Water Cluster Concentrations (1 Atm), from Equation 6	12
2	The Ion Product for Liquid Water Compared to Calculated Values for Water Vapor from Equation 15, Assuming N = 1	15
3	Theoretical Parameters for the Conductivity Cell Assuming N = 1, from Equation 19	18
4	Electrical Connections to the Conductivity Cell	20
5	Effect of Bias Voltage Upon Cell Resistance for Three Different Temperatures and Humidities	20
6	Graphical Solutions for Cell Resistance from $E_b$ , $E_{VTVM}$ , $\theta$ , and (s) for Five Values of $E_b$	21

#### ELECTRICAL CONDUCTIVITY OF MOIST AIR

## I. CELL DESIGN AND FABRICATION FROM THE WATER ION CLUSTER THEORY

### I. INTRODUCTION.

This is the first of two reports dealing with the electrical conductivity of moist air and its measurement. This report discusses cell design and fabrication; the second report will describe actual conductivity measurements and results. The purpose of this work was to give some physical basis to the measurement of polymolecular water ion clusters (ion hydrates) found in water vapor and in moist air, other than their infrared absorption. The hydrogen bonding of polymolecular water ion clusters accounts for strong absorption of infrared radiation by the atmosphere  $^{1,2}$  at wavelengths from about 3  $\mu$ m to at least 20  $\mu$ m. This absorption increases steadily with increasing wavelength.

Infrared measurements of atmospheric absorption alone cannot establish unequivocally that this absorption arises from water ion clusters and not from some other atmospheric constituent including water vapor (monomer) itself. Conversely, simple ion mobility measurements of moist air cannot establish the ionic species present, and the identity of such species has been the subject of long conjecture in the literature. The objective of the work reported here was to investigate specific connections between infrared absorption attributed to water ion clusters in the atmosphere and the electrical conductivity of moist atmospheric air producing that infrared absorption.

### II. INFRARED OBSERVATIONS LEADING TO THE CELL DESIGN.

For about 40 years, an infrared "continuum" absorption of the atmosphere has been known to exist and to be associated in some complex way with water vapor concentration. Varanasi, et al., found such "anomalous" absorption and suggested that it might be due to hydrogen bonding between water molecules. Bignell made confirmatory measurements, called this "e-type" absorption after his term "e" for partial water vapor pressure, and discussed the water dimer (i.e., the homogeneous cluster of size two) as the possible cause. Roberts, et al., recently summarized measurements of this absorption by many workers in the infrared. Our own measurements and observations 1,2 taken radiometrically (i.e., by thermal emission) have characterized the magnitude and spectra of anomalous absorption and emission. In addition, we have found clearly aerosol-like characteristics of the "anomalous species" which, with wavelength shifts of observed spectra and other evidence, point almost conclusively to distributions of ion clusters of water having mean sizes of 11 to 13 molecules per cluster as the species responsible for anomalous infrared "continuum" absorption.

The spectral properties of liquid water have been extensively characterized in the infrared. The Liquid water is nearly completely hydrogen-bonded or clustered, 8-10 and its anomalous infrared absorption between interatomic bands is attributed to intermolecular or lattice-vibrational ("librational") bonding which should be analogous to this bonding found in smaller clusters in the vapor phase. Thus it was seen possible to approximate the peak absorption

intensity due to hydrogen bonds in clusters in the vapor phase from those already carefully measured for liquid water. These developments were carried out over a considerable period of time, but they can be summarized as follows:

Water clusters in moist air or in water vapor can be considered as tiny aerosol particles and can be treated by the approximations of aerosol spectroscopy 11 which apply when the mean particle diameter is much smaller than the wavelength of observation; i.e., the Rayleigh approximation case. Thus, if the anomalous absorption due to clusters in water vapor is considered alone (at wavelengths where there is only negligible absorption due to the water monomer and other atmospheric constituents), the Beer-Lambert law can be written:

$$\ell n(1/T_{\lambda}) = (\alpha_{c})_{\lambda} C_{c}L, \qquad (1)$$

where  $(\alpha_c)_{\lambda}$  is the mass absorption coefficient of water clusters,  $m^2/gm$ , and  $C_c$  is the cluster concentration,  $gm/m^3$ . These and subsequent terms are defined in the glossary.

Atmospheric spectroscopists measuring anomalous infrared absorption specify the absorption coefficient in another way, referring to it as the "self-broadened" absorption coefficient of water "vapor" having the symbol  $(C_s^o)_{\lambda}$  and the units cm²/molecule-atmosphere (of vapor). This refers the anomalous absorption, which we are here attributing to hydrogen bonding, to a useful, averaged molecular basis.

When conversion factors are included, it is straightforward to show that  $(C_S^0)_{\lambda}$  can be expressed in terms of the cluster mass absorption coefficient  $(\alpha_c)_{\lambda}$ , cluster concentration,  $C_c$ , and other parameters as:

$$(C_s^0)_{\lambda} = \frac{0.77 \times 10^{-18} (\alpha_c)_{\lambda} C_c \theta_k}{(s)^2 (p_0)^2}$$
 (2)

From absorption measurements of liquid water  $^{12}$  near the 15- $\mu$ m wavelength where an absorption maximum attributed to intermolecular hydrogen bonding occurs, it is found that  $(\alpha_c)_{\lambda_{max}} = 3370/(n_c)_{\ell}$  cm<sup>2</sup>/gm, where  $(n_c)_{\ell}$  is the mass fraction of clustered molecules in liquid water, stated to be near 1.0. Substituting this expression into equation 2 and expressing cluster concentration in the vapor phase as a mass fraction,  $(n_c)_{\ell}$ , of total water vapor yields

$$(C_s^o)_{\lambda_{\text{max}}} = \frac{7.6 \times 10^{-17} (n_c)_v}{(s) (p_o) (n_c)_{\ell}}$$
 (3)

If the assumptions to this point are reasonably valid, equation 3 becomes a very important link between atmospheric infrared absorption measurements (already carefully made by many spectroscopists<sup>5</sup> under a wide variety of meteorological conditions) and the physical nature of the water clusters themselves; i.e., their sizes and concentrations accounting for infrared absorption in the vapor phase over a wide range of temperatures and saturation ratios. It then becomes a simple matter to substitute experimental data for  $(C_S^0)_{\lambda}$  into equation 3 and to learn directly the relationship between the fraction of water vapor which is clustered,  $(n_c)_V$ , and the saturation ratio (fractional relative humidity), (s). For example, at  $20^{\circ}$ C, this relationship for the cluster species absorbing near  $10.4 \, \mu \text{m}$  in the infrared is found to be:

$$(n_c)_v = 6 \times 10^{-5} (s)$$
  $(\theta_c = 20^{\circ} C)$  (4)

Furthermore, since  $(C_s^0)_{\lambda}$  has been measured at many temperatures, it is found that, over a range of temperatures above  $10^{\circ}$ C, an empirical relationship exists so that for the cluster species in the vapor absorbing near  $\lambda = 10.4 \, \mu \text{m}$ :

$$(n_c)_{\rm v} \approx 6.6 \times 10^{-7} \,({\rm s}) \,(\theta_c)^{1.5}$$
 (5)

where equation 4 is a special case of equation 5 for  $\theta_{\rm C} = 20^{\rm o}$  C. Note that  $\theta_{\rm C}$  is the Celsius temperature, not absolute temperature. It then follows that an empirical equation for the concentration of this species derived from infrared measurements of the atmospheric spectroscopists can be written

$$C_c \approx \frac{1.9 \times 10^{-4} \text{ (s)}^2(p_0)(\theta_c)^{1.5}}{\theta_k}$$
 (6)

Equation 6 is plotted in figure 1.

An important observation by spectroscopists concerning  $(C_S^0)_{\lambda}$  is that the values obtained are quite consistent regardless of where or when the measurements were made. It is found that, to within a factor of two to three, measurements of  $(C_S^0)_{\lambda}$  taken under conditions ranging from the purest of water vapor samples to the most contaminated of atmospheres show this order of agreement. Further, there is no correlation between the cleanliness of an experiment and the magnitude of anomalous absorption, assuming, of course, that care has been taken to avoid optical extinction by large aerosols formed on foreign nuclei in the sample path. From a water cluster standpoint, this indicates a rather constant cluster mixing ratio or equilibrium concentration for stable temperature and humidity conditions. One possible source of ions for the formation of ion clusters in the vapor would thus be the dissociation of water itself according to

$$H_2O \approx H^+ + OH^- \tag{7}$$

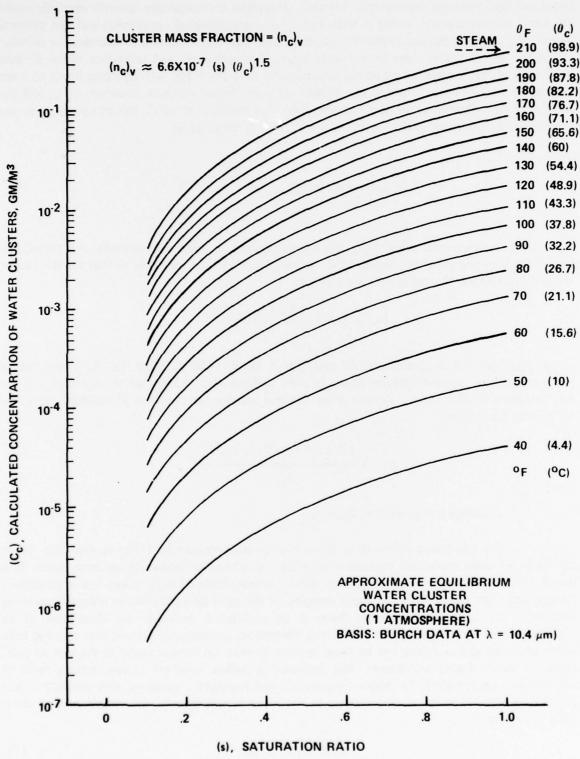


Figure 1. Approximate Equilibrium Water Cluster Concentrations (1 Atm), from Equation 6 (Burch data: reference 5)

followed, for example, by

$$H^+ + H_2O \Rightarrow H_3O^+$$
 (8)

where the hydronium and hydroxyl ions become "nuclei" necessary to begin the formation of polymolecular water clusters of some size distribution, and the mean size or cluster number will be determined primarily by the saturation ratio, (s). In this way, even triply-distilled water vapor in a closed optical cell free of foreign nuclei and ions could spontaneously produce its own clusters and  $(C_2^0)_{\lambda}$  values comparable to those found in much more contaminated environments.

Another clue to the ionic dissociation of water vapor as a source of cluster "nuclei" is the curious term  $(\theta_c)^{1.5}$  found empirically and shown in equation 5 and equation 6. It is well known that vapor pressure has a steep nonlinear temperature dependency; for example, water vapor, in going from  $10^{\circ}$ C to  $60^{\circ}$ C, exhibits a 16-fold increase in its equilibrium vapor pressure. This is nearly the same value as the 15-fold increase over this temperature range required by the empirical term  $(\theta_c)^{1.5}$ . The indication is that cluster concentration is directly proportional to water vapor pressure. But there is another property of water which has an even larger temperature dependency; namely, its dissociative ion product. For example, liquid water shows a 33-fold increase in its ion product  $^{13}$  over the temperature range from  $10^{\circ}$ C to  $60^{\circ}$ C. The ion product is derived from equation 7 as follows:

For the ionization of water, the equilibrium constant is defined as

$$K = \frac{{}^{a}H^{+}{}^{a}OH^{-}}{{}^{a}H_{2}O}$$
 (9)

where a is the molar concentration of the subscripted species. Since, for water, ionization is at best slight, the concentration of un-ionized water is unaffected and the ion product is written simply as

$${}^{\bullet}K_{\mathbf{w}} = a_{\mathbf{H}^{+}}a_{\mathbf{OH}^{-}}$$
 (10)

We shall use this same expression for the vapor phase. Thus it becomes possible on the basis of the foregoing assumptions to derive an expression for  $K_{\mathbf{W}}$  in the vapor phase in terms of water cluster and vapor parameters.

Beginning with equation 6 in liter units and Avogadro's number  $(N_{avo})$ , from which the number of clustered molecules per gram of liquid water is found to be  $0.33 \times 10^{23} (n_c)_{\ell}$ , the product of these expressions becomes

$$\frac{\text{No. of clustered molecules}}{\text{liter of sample}} = \frac{0.64 \times 10^{16} (\text{s})^2 (\text{p}_0) (\theta_c)^{1.5} (\text{n}_c)_{\ell}}{\theta_k}$$
(11)

If N is the number of ions required per cluster and (c-1) is the number of bonds per cluster, then from equation 11 the number of ions required in the total of water molecules present is directly proportional to the cluster mass fraction (equation 5) and has the form

$$\frac{\text{No. of ions required}}{\text{No. of water molecules}} = \frac{(n_c)_V(N)}{(c-1)} = \frac{6.6 \times 10^{-7} \, (\text{s})(N) (\theta_c)^{1.5}}{(c-1)}$$
(12)

The ionization of a water molecule (equation 7) produces an ion pair. Rather than assign the role of cluster "nucleus" or charge carrier to either the H<sup>+</sup> or OH<sup>-</sup> ion, it is useful to work with the concentration of either since presumably their concentrations will be the same in a given water vapor sample. Thus from equation 10 and for the vapor phase, we can write

$$\left(\sqrt{K_{W}}\right)_{V} = a_{H} + = a_{OH} - \tag{13}$$

It follows that the number of ions per water molecule (equation 12) is equal to

$$\frac{(n_c)_v(N)}{(c-1)} = \left(\sqrt{K_w}\right)_v(N_{avo}) \frac{\theta_k}{(0.289)(s)(p_o)} \cdot \frac{18}{(N_{avo})(n_c)_{\varrho}}$$
(14)

from which

$$\left(\sqrt{K_{\mathbf{w}}}\right)_{\mathbf{v}} = \frac{k(C_{\mathbf{c}})(N)}{(c-1)} = \frac{0.106 \times 10^{-7} (s)^2 (p_{\mathbf{o}}) (\theta_{\mathbf{c}})^{1.5} (N)}{(\theta_{\mathbf{k}}) (c-1)}$$
(15)

Equation 15 is plotted in figure 2, which also shows for comparison the ion product of liquid water as a function of temperature. It is important to realize that the ion product reflects only the degree of ionization of molecules present in a phase of water. Hence, the comparability of the ion products of liquid water and, for example, saturated vapor in figure 2 should not be cause for concern. The  $(n_c)_v$  term will correct for actual cluster concentrations in a given water vapor sample.

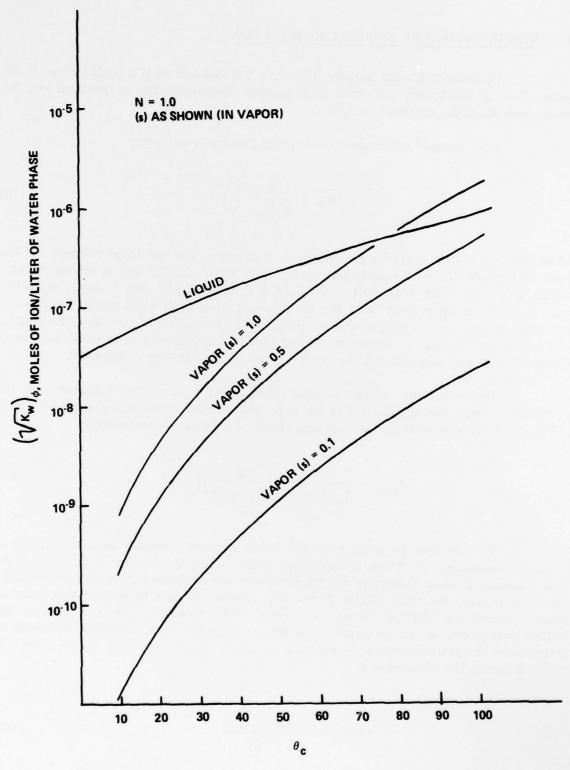


Figure 2. The Ion Product for Liquid Water Compared to Calculated Values for Water Vapor from Equation 15, Assuming N = 1

### III. DESIGN PROCEDURE AND CELL FABRICATION.

Equation 15 is quite complex. Therefore, it is useful to see if it could be used in the design of an air conductivity cell which would produce experimental data in agreement with the theory from which the equation was derived.

From Lange 14 and Franks, 15 it is found that for "pure" water

$$\sqrt{K_{\rm w}} = \frac{X}{R_{\rm ohms}} \left(\frac{L}{A}\right) \tag{16}$$

where (L/A) is a "cell factor" with units cm<sup>-1</sup> (and hence, the key design element) and X is equal to 1000 divided by the equivalent conductivities of H<sup>+</sup> and OH- ions at infinite dilution. Values of X range from 2.90 at 0°C to 0.73 at 156°C. It is possible that X also is dependent upon (s), as is the ion product. Since this has not been established, X was treated as a constant a given temperature for design purposes. However, the assumption of constancy of X with (s) a conservative one, as this dependency would make the conductivity of moist air even more sensitive to humidity than will be shown to be the case in the following development.

To use equation 16 for the vapor phase, a density correction is necessary and the electrical resistance can be converted at the same time to more convenient megohm units (cell resistance or resistivity is simply the reciprocal of cell conductance or conductivity)

$$R_{\text{meg}} = \frac{X}{\left(\sqrt{K_{\text{w}}}\right)_{\text{v}}} \left(\frac{\theta_{\text{k}}}{289 \, (\text{s}) \, (\text{p}_{\text{o}})}\right) \left(\frac{L}{\text{A}}\right) \tag{17}$$

It is possible to make relatively simple electrical resistance measurements up to about 1000 megohms. Therefore, a design "cell factor" of  $(L/A) = 10^{-5} \,\mathrm{cm}^{-1}$  was chosen as the value necessary to insure reasonably easy measurements over moderate temperature and humidity ranges if, in fact, the water cluster theory were correct. It must be realized that literature values  $^{16}$  quoted for "dry" air taken, for example, with a Gerdien  $^{17}$  tube can reach as high as  $10^{26}$  megohm-cm. It was recognized that the cell factor of the completed cell could be measured by the determination of its electrical capacitance, treating the cell as a capacitor with an air dielectric. The relationship is

$$(L/A)_{cm}^{-1} = \frac{8.85 \times 10^{-8}}{C_{uf}}$$
 (18)

It is also possible to obtain a very useful equation for  $R_{meg}$  by combining equation 15 and equation 17

$$R_{\text{meg}} \approx \frac{3.3 \times 10^5 \,(\text{X}) \,(\theta)_{\text{k}}^2 \,(\text{c} - 1)}{(\text{s})^3 \,(\text{p}_{\text{O}})^2 \,(\theta_{\text{c}})^{1.5} \,(\text{N})} \left(\frac{\text{L}}{\text{A}}\right)_{\text{cm}^{-1}}$$
(19)

Note that equation 19 indicates that a given conductivity cell at a fixed temperature will have a resistance dependent only upon (s) and mean cluster size (c). For example, at  $25^{\circ}$ C if N = 1 and (L/A) =  $10^{-5}$  cm<sup>-1</sup>, then

$$R_{\text{meg}} \approx \frac{8(c-1)}{(s)^3} \tag{20}$$

assuming that X is constant with changing (s) as discussed earlier. If not, then (s) will have a power even larger than three.

Equation 20 predicts, at a fixed temperature, that  $R_{\text{meg}}$  is directly dependent only upon the mean size of polymolecular ion clusters of water present and the inverse cube of (s); i.e., the fractional relative humidity. If experimentally verified, this information could reshape present theories of space charge dissipation as a function of humidity. For example, the uncomfortable static shocks experienced in the dry air of heated homes in wintertime could be more reasonably correlated with an inverse cubic dependency upon (s) than with a simple, linear one. The (c-1) term in equation 20 is important in determining the cluster species present. For example, if the water dimer (c-1=1) were responsible for observed cell resistances rather than an ion cluster of, say, size 13 (c-1=12), then experimental values of  $R_{\text{meg}}$  should be approximately 12 times smaller for the dimer than for the suspected species, given that the dimer were an ion in the first place which, if homogeneous, it would not be.

The chosen design value of  $(L/A) = 10^{-5}$  cm<sup>-1</sup> resulted in a cell consisting of 40 1-mm-thick steel plates, each 41 cm square and spaced 0.66 cm apart. Alternating plates were connected to either of two bus wires running the length of the cell, somewhat in the fashion of the plates in an automotive storage battery but with moist air as the electrolyte in this case. The plates were supported by five 8-mm-diameter resin-impregnated fiberglass rods with nylon spacers. These materials were selected for their high electrical resistance, computed to have negligible shunting resistance compared to expected cell resistances for moist air from the water cluster theory. Nevertheless, care was taken to minimize contact area between the rods, spacers, and steel plates. The completed cell is shown in its test cabinet in the frontispiece of this report.

The capacitance of the completed cell was measured as  $0.010 \,\mu\text{f}$ . Thus, from equation 18, the cell factor was determined as  $(L/A) = 8.85 \times 10^{-6} \, \text{cm}^{-1}$ , which is close to the design value of  $10^{-5} \, \text{cm}^{-1}$ . This value was substituted into equation 19 to produce a very useful plot shown in figure 3. This figure was reproduced in multiple copies for use as a laboratory worksheet upon which cell data points can be plotted directly for comparison with theoretical predictions.

17

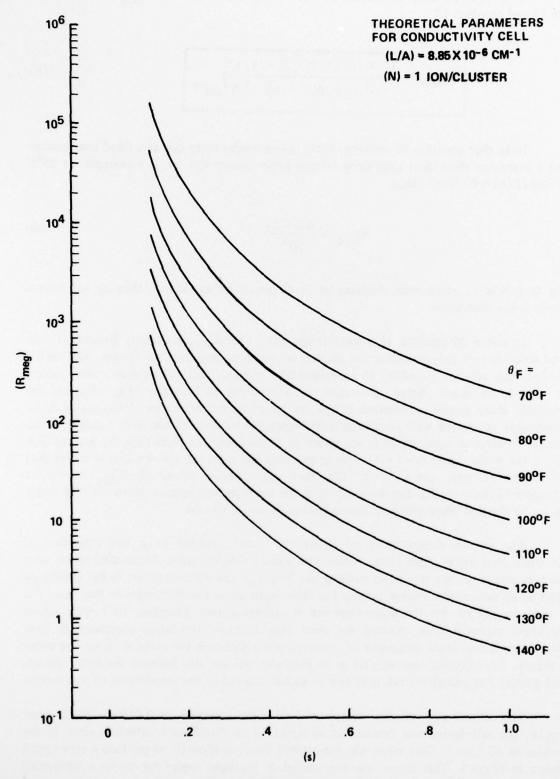


Figure 3. Theoretical Parameters for the Conductivity Cell
Assuming N = 1, from Equation 19

The cell resistance is read by a simple series arrangement of the bias source, the vacuum-tube voltmeter (VTVM) having an 11-megohm input impedance, and the cell itself. The schematic is shown in figure 4.

Obviously, the level of the supply voltage  $E_b$  is of concern, since high voltages can themselves cause ionization of moist air and any contaminants present. Therefore, a series of voltage trials was run at different temperatures and humidities to determine how  $R_{meg}$  of the cell varied with the bias voltage,  $E_b$ . Results of a few trials are summarized in figure 5 where it can be observed that, although  $R_{meg}$  varied about as predicted by theory with temperature and humidity (parameters affecting water ion cluster concentration), the effects of  $E_b$  up to 100 volts upon  $R_{meg}$  were small, falling within the range of theoretical and experimental inaccuracy.

A bias voltage of  $E_b$  = 20 v was selected for general use. A worksheet (figure 6) was prepared including  $E_b$  values of 1, 5, 50, and 200 volts as well, which can be used as needed for graphical solutions to determine  $R_{meg}$  directly from  $E_{VTVM}$  and  $E_b$  and then can be used to compare the results to theoretical values from equation 19 for the actual cell constant used. Extensive tests were run with the completed cell to insure that insulator leakage was not a factor in the measurements, especially under higher-humidity conditions. These tests established that leakage was not significant even at (s) values near 0.7 (i.e., 70% relative humidity).

The 0.66-cm cell-plate spacing was chosen to allow adequate circulation of moist air between plates and to reduce the likelihood of short circuits due to contamination which might have been troublesome with closer spacing. A larger spacing would have increased the cell factor or required larger cell dimensions, both undesirable alternatives. Even so, it is found in practice that the cell is short-circuited from time to time by lint or "whisker"-like contamination which finds its way between adjacent plates. We have found that the cell can be "cleaned" and restored to normal "quiet" operation by the momentary application of 400 volts directly across the plates. Therefore, this procedure will be used before all experiments are run and the data will be reported in a subsequent report.

Interestingly, the cell itself develops an electromotive force of about 0.02 volt. This is negligible in most measurements, and when taken into account it is found that the cell resistance is the same under normal operating bias voltages, regardless of the polarity of the voltage applied to the cell.

## IV. RESULTS OF OTHER WORKERS.

From its first operation, the conductivity cell has produced resistance readings of moist air close to the values predicted by the water ion cluster theory and having the correct trends with temperature and humidity. Although it is a relatively simple device, we have not been able to find references to the construction or use of a similar device in the literature of electrostatics or cloud physics. But correlations do appear to exist between our work on ion clusters and that of other workers who have investigated ionic phenomena such as ion mobilities in their studies of atmospheric electricity. <sup>18</sup> For example, Wright <sup>19</sup> believed that the masses of the "small ions" which he investigated in moist air were equal to those of clusters of 10 or 12 water molecules, and Chalmers <sup>18</sup> states that the general result of investigations of Wright

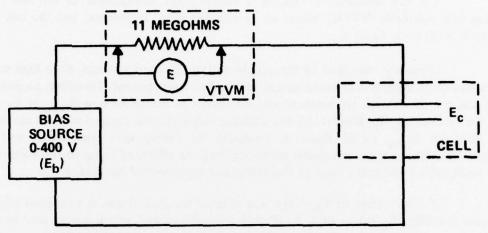


Figure 4. Electrical Connections to the Conductivity Cell


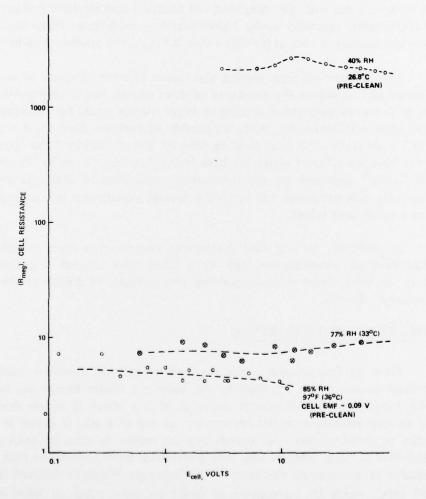


Figure 5. Effect of Bias Voltage Upon Cell Resistance for Three Different Temperatures and Humidities

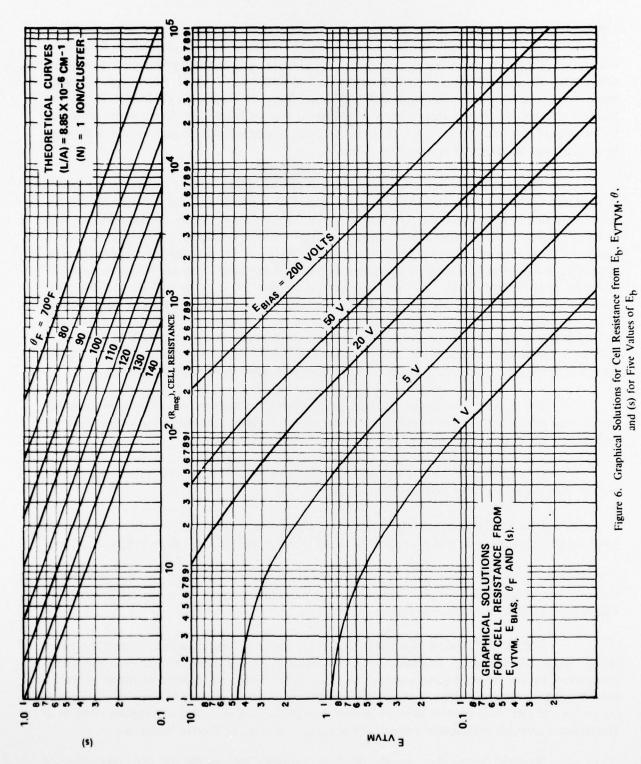

and other workers is that a small "ion consists of a single ionized molecule with other molecules clustered around it, and kept together by the charge". It would be very difficult to find better descriptions than these of polymolecular water ion clusters such as those postulated by us to be the cause of atmospheric infrared "continuum" absorption, 1,2 based upon our (spectral) measurements which are completely different from those of Wright or Chalmers. Yet it was through infrared absorption measurements and the subsequent theoretical development presented in this report that our conductivity cell was designed, leading directly to correlations with work in atmospheric electricity as reported by others.

The mobility of ion clusters of water is on the order of 1 to 2 cm/sec for 1 v/cm<sup>19</sup>. It is known to be dependent upon (s), total pressure, and temperature. Under similar conditions, it is found that negative ions (e.g., OH<sup>-</sup> ion of a pair from equation 7) have greater mobility than those of positive "ions" [e.g., a water cluster of  $H_3O^+ \cdot (H_2O)_n$ ]. Clearly, these mobilities are a factor in the design of a device to measure conductivity of air, such as the Gerdien<sup>17</sup> tube. Typically, small sampling cylinders containing conductors are used, with air drawn through the cylinders at sufficiently high velocities to insure that Ohm's law holds. Indeed, for the static conditions of our own cell, we performed bias voltage measurements described in this report to satisfy ourselves that Ohm's law holds over the stated range of bias voltages. If the air velocity and other parameters are known, it becomes possible to compute air conductivities or mean ionic mobilities directly. In a crude sense, slower ions are blown out of the tube before they can travel from one electrode to the other. Hence, conductivity goes down as air velocity goes up.

But it is for the specific purpose of measuring conductivity of moist air, presumably due mainly to dissociative equilibrium ion cluster pairs of water, that our cell has been designed and fabricated. In this sense, our cell may be unique in two respects:

- 1. It is large in size (L/A is small) compared to usual conductivity tubes, which have modest dimensions and very poor cell factors, and
- 2. It is used to measure static air under equilibrium conditions as a direct measure of water-related ions present, which might otherwise be swept out of the cell in a flowing system.

For example, it would seem that a measurement of "air" conductivity in the absence of water-related ions would be quite useless to a meteorologist trying to relate conductivity to atmospheric electricity, weather patterns, and so forth.

Mühleisen<sup>20</sup> found that moist air in an enclosed space acquires a negative space charge under high-humidity conditions and a positive charge at lower humidities. This could correspond to the much higher concentration of water ions and clusters at higher (s) values (equation 15), with the positive ions partially neutralized in water clusters like H<sub>3</sub>O+·(H<sub>2</sub>O)<sub>n</sub> and an excess of OH<sup>-</sup> ions present as more mobile, charge-carrying ions. It could explain changes in atmospheric air-earth conduction current which occur at sunrise or shortly thereafter.

Moore<sup>16</sup> states that usually the ions primarily responsible for the conduction of atmospheric electricity "are clusters comprised of a few molecules carrying either a single positive or negative elementary charge." This agrees well with our results. Yet in noting how

certain electrostatic phenomena, such as the charging of a person who walks across a rug, very nearly disappear at high relative humidities, Moore states that some workers "have erroneously attributed this sensitivity to humidity of electrostatics to the electrical conductivity of the air." Rather, he attributes this to increased electrical conductivity of dielectric substances, due to adsorbed moisture layers above 50% RH (s = 0.5), which drain off accumulated charges in a fraction of a second. We have pointed out that our theoretically-derived dependence of conductivity of moist air upon (s) is much greater than previously thought (equation 20). Thus, the "erroneous" explanation above ought to be carefully reexamined in light of this new finding, since it has much more to recommend it than an insulator theory to which many exceptions suggest themselves.

The numbers of ions which must necessarily be present in moist air to account for conductivities found in our trials to date with the conductivity cell seem much larger than previously thought. For example, the water cluster theory predicts that, for saturated air at  $20^{\circ}$ C, a mass fraction ( $n_{\rm c}$ )<sub>v</sub> =  $6 \times 10^{-5}$  of clusters should exist (equation 5). Since an average cluster under these conditions contains 13 water molecules but only one ion (N = 1 assumed), the original fraction of water vapor ionized must have been  $(6 \times 10^{-5})/13 = 0.46 \times 10^{-5}$  ion pairs of all water molecules. Since the concentration of saturated water vapor at  $20^{\circ}$ C is 0.0173 gm/liter or  $5.8 \times 10^{20}$  molecules per liter, the ion concentration is  $5.8 \times 10^{20} \times 0.46 \times 10^{-5} = 2.65 \times 10^{15}$  ion pairs per liter or roughly  $10^{15}$  ions per liter in unsaturated moist air. This figure is several orders of magnitude larger than values usually quoted for atmospheric ion densities, suggesting that water-related ions have not been properly accounted for previously. But their existence is essential to account for atmospheric infrared attributed to them, as discussed in this report.

### V. CONCLUSIONS.

Initial data taken with the conductivity cell are in good agreement with theoretical predictions of the polymolecular water ion cluster theory. The measured conductivities are much greater than those obtained using traditional, flowing air sensors such as the Gerdien tube, indicating that under some conditions moist air can contain on the order of 1015 ions per liter, some of which originate from the ionic dissociation of water molecules themselves. The ions formed, for example, are of the form  $H_3O^+\cdot (H_2O)_n$ , where in moist air "n" is on the order of 10 or 11. The positive ions are those referred to as polymolecular ion clusters in the water cluster theory, to which we attribute the infrared "continuum" absorption of the atmosphere. The numbers and kinds of ions necessary to explain atmospheric infrared absorption therefore are consistent with the ions necessary to explain electrical conductivities of moist air measured in initial operations with our cell. We conclude that the initial results suggest that the same species are responsible for infrared absorption attributed to water ion clusters in the atmosphere and the electrical conductivity of moist atmospheric air. A future report will discuss measurements to be made of moist air under a wide variety of conditions. In particular, the dependence of conductivity upon saturation ratio will be investigated for implications affecting present theories of electrostatic space charge dissipation.

## LITERATURE CITED

- 1. Carlon, H. R. ARCSL-TR-78001. Anomalous Infrared Emission from Condensing and Cooling Steam Clouds. December 1977.
- 2. Carlon, H. R. ARCSL-TR-78014. Introduction to Polymolecular Water Clusters and Their Infrared Activity. February 1978.
- 3. Varanasi, P., Chou, S., and Penner, S. S. J. Quant. Spectrosc. Radiat. Transfer 8, 1537 (1968).
  - 4. Bignell, K. J. Quart. J. Royal Meteorol. Soc. 96, 390 (1970).
- Roberts, R. E., Selby, J. E. A., and Biberman, L. M. Appl. Opt. 15, 2085
   (1976).
- 6. Carlon, H. R. ARCSL-TR-77059. Infrared Absorption Spectra Attributed to Ion-Nucleated Water Clusters. September 1977.
- 7. Pinkley, L. W., Sethna, P. P., and Williams, D. J. Opt. Soc. Am. 67, 494 (1977).
  - 8. Luck, W. A. P. Disc. Faraday Soc. 43, 115 (1967).
  - 9. Ibid., 132.
- 10. Luck, W. A. P. Inaugural dissertation. Spektroskopische Bestimmungen der Wasserstoffbrückenbindungen in Naher IR. University of Heidelberg. 1968.
- 11. Carlon, H. R., Anderson, D. H., Milham, M. E., Tarnove, T. L., Frickel, R. H., and Sindoni, I. Appl. Opt. 16, 1598 (1977).
  - 12. Hale, G. M., and Querry, M. R. Appl. Opt. 12, 555 (1973).
- 13. Prutton, C. F., and Maron, S. H. Physical Chemistry. Macmillan, New York, New York, p. 492. 1954.
- 14. Lange, N. A., ed. Handbook of Chemistry. Handbook Publishers, Sandusky, Ohio. pp. 1242, 1756. 1952.
- 15. Franks, F., ed. Water: A Comprehensive Treatise. Volume 1, The Physics and Physical Chemistry of Water. Plenum Press, New York, New York. pp. 495-498. 1972.
- 16. Moore, A. D., ed. Electrostatics and Its Applications. Wiley and Sons, New York, New York, p. 396 ff. 1973.

- 17. Gerdien, H. Phys. Z. 6, 800 (1905).
- 18. Chalmers, J. A. Atmospheric Electricity. Pergamon Press, New York, New York, 1967.
  - 19. Wright, H. L. Proc. Phys. Soc., London 48, 675 (1936).
  - 20. Mühleisen, R. Ber. der deut. Wetterd. 51, 62 (1958).

# GLOSSARY

a	Molar concentration of subscripted species, moles per liter
A	Cross-sectional area of cell plates, square centimeters
$\alpha_{c}$	Mass absorption coefficient of water clusters, square meters per gram
(c)	Mean cluster size, number of water molecules per cluster
$C_c$	Cluster concentration in vapor phase, grams per cubic meter
$C_{\mu f}$	Cell electrical capacitance, microfarads
$(C_s^o)_{\lambda}$	"Self-broadened" absorption coefficient of water "vapor", square centimeters per molecule-atmosphere (of vapor)
E <sub>b</sub>	Cell bias supply voltage, volts
Ec	Voltage dropped across cell, volts
E <sub>VTVM</sub>	Voltage read by 11 megohm vacuum-tube voltmeter, volts
k .	A proportionality constant
K	Equilibrium constant for ionization of water, moles per liter
K <sub>w</sub> 1	Ion product of water, moles squared per liter squared
L	Optical path length, meter, or cell plate spacing, centimeters
λ	Wavelength of spectral observation, micrometers 🗸
$(n_c)_v$	Mass fraction of clustered molecules in water vapor
$(n_c)_{\ell}$	Mass fraction of clustered molecules in liquid water
N	Number of ions per cluster
Navo	Avogadro's number, $6 \times 10^{23}$ molecules per gram-mole
p <sub>o</sub>	Saturation vapor pressure of water, millimeters of mercury
R	Cell resistance, subscripted in units ohms or megohms
(s)	Saturation ratio (fractional relative humidity), % RH/100
Т	Optical transmittance
$\theta_{\rm F},\theta_{\rm c},\theta_{\rm k}$	Temperature, °F, °C, or °K, respectively
x	A constant, equal to 1000 divided by the equivalent conductivities of H <sup>+</sup> and OH <sup>-</sup> ions at infinite dilution

### **DISTRIBUTION LIST 2**

Names	Copies	Names	Copies
CHEMICAL SYSTEMS LABORATORY		Deputy Chief of Staff for Research,	
		Development & Acquisition	1
SAFETY OFFICE		Attn: DAMA-CSM-CM	i
Attn: DRDAR-CLF	1	Attn: DAMA-ARZ-D	•
PLANS & PROGRAMS OFFICE		Washington, DC 20310	
Attn: DRDAR-CLR-L	4	IIC A December and Standardization	
		US Army Research and Standardization	1
AUTHOR'S COPIES: Research Division	25	Group (Europe) Attn: Chief, Chemistry Branch	•
		Box 65, FPO New York 09510	
BIOMEDICAL LABORATORY		BOX 63, FFO New TOIK 09310	
Attn: DRDAR-CLL-B	1	Commander	
		HQ US Army Medical Command, Europe	
CB DETECTION & ALARMS DIVISION		Attn: AEMPM	1
Attn: DRDAR-CLC-C	1	APO New York 09403	
	N. A.	APO New Fork 09403	
DEVELOPMENTAL SUPPORT DIVISION	200	HE ARMY MATERIEL DEVELOPMENT AND	
Attn: DRDAR-CLJ-R	3	US ARMY MATERIEL DEVELOPMENT AND	
Attn: DRDAR-CLJ-L	3	READINESS COMMAND	
	18	C	
ENVIRONMENTAL TECHNOLOGY DIVISION	ji .	Commander	
Attn: DRDAR-CLT-E	1	US Army Materiel Development and Readiness Command	
/ \		Attn: DRCLDC	1
MUNITIONS DIVISION	1	Attn: DRCSF-P	•
Attn: DRDAR-CLN	1	5001 Eisenhower Ave	
Designation Designation	1	Alexandria, VA 22333	
PHYSICAL PROTECTION DIVISION	1	Office of the Project Manager for Chemical Demilitarizat	ion
Attn: DRDAR-CLW-P	1	and Installation Restoration	ion
RESEARCH DIVISION		Attn: DRCPM-DR-T	2
Attn: DRDAR-CLB	1	Aberdeen Proving Ground, MD 21010	
Attn: DRDAR-CLB-B	i		
Attn: DRDAR-CLB-C	i	Project Manager Smoke/Obscurance	
Attn: DRDAR-CLB-P	1	Attn: DRCPM-SMK-M	1
Attn: DRDAR-CLB-R	i	Aberdeen Proving Ground, MD 21005	
Attn: DRDAR-CLB-T	î		
Attn: DRDAR-CLB-TE	i	Human Engineering Laboratory HFE Detachment	
Attil. DRDAR-CED-TE		Attn: DRXHE-EA	1
SYSTEMS ASSESSMENTS OFFICE		Building E3220	
Attn: DRDAR-CLY	1	APG-Edgewood Area	
Attn: DRDAR-CLY-R	1	The G Dagowood Thou	
Attil. DRDAR-QLT-R		Commander	
DEPARTMENT OF DEFENSE		US Army Missile Research and Development Command	
DELAKTMENT OF DELENSE		Redstone Scientific Information Center	
Administrator		Attn: DRDMI-TBD	1
Defense Documentation Center		Redstone Arsenal, AL 35809	
	12	Redstone Alsendi, AD 33007	
Attn: Accessions Division (DDC-TC)	12	Director	
Cameron Station Alexandria, VA 22314		DARCOM Field Safety Activity	
Alexandria, VA 22314		Attn: DRXOS-C	1
Di		Charlestown, IN 47111	
Director		Charlestown, III 47111	
Defense Intelligence Agency Attn: DB-4G1	1	US ARMY ARMAMENT RESEARCH AND	
	•	DEVELOPMENT COMMAND	
Washington, DC 20301		DETERMINENT COMMAND	
DEPARTMENT OF THE ARMY		Commander	
DEFARIMENT OF THE ARMI		US Army Armament Research and Development Comma	and
HODA (DAMO-SSC)	1	Attn: DRDAR-GCL	1
HQDA (DAMO-SSC) WASH DC 20310		Aberdeen Proving Ground, MD 21010	
WASH DC 20310		The state of the s	

### DISTRIBUTION LIST 2 (Contd)

Names	Copies	Names	Copies
Commander		US ARMY TEST & EVALUATION COMMAND	
US Army Armament Research and Development Comi	mand		
Atm: DRDAR-LCA	1	Commander	
Attn: DRDAR-LCE	2	US Army Cold Regions Test Center	
Attn: DRDAR-LCE-M	1	Attn: STECR-TD	1
Attn: DRDAR-TSS	2	APO Seattle, WA 98733	
Attn: DRDAR-LCF	1	Aro Scattle, WA 70755	
Atm: DRDAR-LCU	1	DEPARTMENT OF THE NAVY	
Attn: DRDAR-SCA-PP	i	DEPARTMENT OF THE NAVI	
Atm: DRDAR-SCN	i		
	i	Chief of Naval Research	1
Attn: DRDAR-SCP-A	i	Attn: Code 443	•
Attn: DRDAR-SER		800 N. Quincy Street	
Dover, NJ 07801		Arlington, VA 22217	
Director		Commanding Officer	
Ballistic Research Laboratory		Naval Weapons Support Center	
Attn: DRDAR-TSD-S	1	Attn: Code 5042/Dr. B. E. Douda	1
Building 328		Crane, IN 47522	
Aberdeen Proving Ground, MD 21005	1	Camire, 217 17/000	
TO ARMY ARMAMENT MATERIEL READINESS O	OMMAND	DEPARTMENT OF THE AIR FORCE	
	1	HO Foreign Technology Division (AFSC)	
mmander	,	Atm: PDRR	1
S Army Armament Materiel Readiness Command	1	Wright-Patterson AFB, OH 45433	
Attn: DRSAR-ASN	1/	Wight-Patterson Arb, Oit 45455	
Attn: DRSAR-IMB-C	7		
	1	Commander	
Rock Island, IL 61201	1	Aeronautical Systems Division	1
	1	Attn: ASD/AELD	
Commander	1	Wright-Patterson AFB, OH 45433	
US Army Dugway Proving Ground	1.		
Attn: Technical Library, Docu Sect	/ 1	HQ AFISC/SEV	1
Dugway, UT 84022	/	Norton AFB, CA 92409	
Commander		OUTSIDE AGENCIES	
Rocky Mountain Arsenal		OUTSIDE AGENCIES	
Attn: SARRM-QA	1	Battelle, Columbus Laboratories	
Commerce City, CO 80022			1
Commerce City, CO 80022		Attn: TACTEC	
		505 King Avenue	
Commander		Columbus, OH 43201	
Pine Bluff Arsenal			
Attn: SARPB-ETA	1	Director of Toxicology	1
Pine Bluff, AR 71611		National Research Council	
		2101 Constitution Ave, NW	
US ARMY TRAINING & DOCTRINE COMMAND		Washington, DC 20418	
Commandant		Director	
US Army Infantry School		Central Intelligence Agency	
Attn: NBC Division	1	Attn: ORD/DD/S&T	1
Fort Benning, GA 31905		Washington, DC 20505	
Fort Benning, GA 31703		washington, DC 20303	
Commandant		ADDITIONAL ADDRESSEES	
US Army Military Police School/Training Center		US Public Health Service	
Attn: ATZN-TDP-C	1	Room 17A-46 (CPT Osheroff)	1
Fort McClellan, AL 36205		5600 Fishers Lane	
FOR McCleuan, AL 30203		Rockville, MD 20857	
Commander		Commander	
US Army Infantry Center		US Army Environmental Hygiene Agency	
Attn: ATSH-CD-MS-C	1	Attn: Librarian, Bldg 2100	1
Fort Benning, GA 31905		Aberdeen Proving Ground, MD 21010	
ron benning, GA 31903			

### DISTRIBUTION LIST 2 (Contd)

Names	Copies	Names	Copies
Commander		USA Atmospheric Sciences Laboratory	1
DARCOM, STITEUR		DRSEL-BL-AS-P (Dr. K. White)	
Attn: DRXST-ST1	1	White Sands Missile Range, NM 88002	
Box 48, APO New York 09710		,	
		Dr. John N. Howard	1
Commander		7 Norman Road	
US Army Science & Technology Center-Far East Office	1	Newton Highlands, MA 02161	
APO San Francisco 96328		1	
		Commander	
HQDA DASG-RDZ (SGRD-PL)	1	USA Research Office	
WASH DC 20314		Box 12211	
D		DRXRO-GS (Attn: Dr. A. Dodd)	1
Dr. James L. Kassner, Director		Research Triangle Park, NC 27709	
Graduate Center for Cloud Physics	1		
Space Sciences Research Center	•	Dr. Darrell Burch	1
University of Missouri-Rolla Rolla, Missouri 65401		Agroneutronic Division	
Rolla, Missouli 05401		Ford Aerospace and Communications	
HODA	1	Ford Road Newport Beach, CA 92663	
Attn: DAMA-ARZ-D (Dr. F. Verderame)	1	Newport Beach, CA 92003	
Washington, DC 20310	5	Dr. Mark Sharnoff	1
1	15	Dept of Physics	
Prof. Marvin R. Querry	F*	Univ of Delaware	
Dept. of Physics	. 1	Newark, DE 19711	
University of Missouri		Tionala, DD 17/11	
Kansas City, MO 64110	1	USA Rsch & Standardization Group (Europe)	1
	1	Attn: Dr. Hoyt Lemons	
Dr. Raymond Mackay	1	Box 65, FPO New York 09510	
Dept of Chemistry			
Drexel University		Dr. D. Deirmendjian	1
32nd & Chesnut Streets		The Rand Corporation	
Philadelphia, PA 19104		Main Street	
		Santa Monica CA 90406	
Chemical Systems Laboratory		*	
Attn: DRDAR-CLB-PO (J. Vervier)	1	Dr. Robert Meredith	1
Aberdeen Proving Ground, MD 21010		Science Applications, Inc.	
		15 Research Drive	
AFCL/OPI/Stop 30		Ann Arbor, Michigan 48103	
Attn: Dr. R. McCatchey	1		
Hanscom AFB, MA 01/131		Prof. Benjamin M. Herman	1
Prof. Donald V. Lora	1	Inst. of Atmospheric Physics	
Prof. Ronald K. Long Ohio State Univ. Research Foundation	1	Univ. of Arizona	
1314 Kinnear Road		Tucson, Arizona 85721	
Columbus, Ohio 43212		D. Bake A Castlian	
Columbus, Onto 43212		Dr. Robert Spellicy	1
Dr. Robert E. Roberts	1	Science Applications, Inc.  % Atmospheric Sciences Laboratory	
Inst. for Defense Analysis		DRSEL-BL-AS-P (Attn: K. White)	
Science & Technology Division		White Sands Missile Range, NM 88002	
400 Army-Navy Drive		Willie Ballus Missaic Marge, MM 00002	
Arlington, VA 22202		Commander	
		USEUCOM	
Dr. James J. Gallagher	1	Attn: ECJ5-O/LTC James H. Alley	1
Engineering Experiment Station		APO, NY 09128	
Georgia Inst. of Technology			
Atlanta, GA 30332			
USA Ballistic Research Laboratory	1		
DRDAR-BLB (Dr. Geo. Keller)			
Aberdeen Proving Ground, MD 21005			